



RCC 320 R & RCC 640 R

Artison's second generation of the RCC (Reactance Cancelling) In-Wall Subwoofers are the most advanced in the world. Designed to be easily installed into a standard 2 x 4 stud bay when construction is completed, special aluminum enclosures make the addition of a powerful yet invisible bass system a onetime simple operation. The bass projects from a slot, which is located between two opposing sets of drivers creating the vibration free signature technology of the RCC Series. Special adsorptive material coupled with multiple custom long throw drivers allow for deep powerful bass from a very small space. They represent the state of the art in subwoofer designs that are heard...but not seen.




- All Aluminum Enclosure for rigid yet compact design.
- Adsorptive Damping Material for a very small enclosure, allowing for more versatile installation applications.
- IP 65 Rating is among the highest of waterproof ratings
- Reactance Cancelling Configuration eliminates vibrations
- Long throw custom drivers for High output
- New Full Feature 1 RU Class D Amplifier can drive multiple subwoofer Modules

RCC 320 R Retrofit

- Driver Complement: (4) RCC 4" x 6" Woofers
- System DCR: 6.4 Ohms
- Power Handling: 200 WRMS
- System Response: 30 Hz - 160 Hz \pm 3 dB
- SPL: 91 dB @ 2.83 V / 1 M
- Magnetic Grilles: Micro Perforated Steel, Paintable
- Cut-out: 13.4"h (342 mm) x 14.2"w (360 mm) x 3.8"d (97 mm)
- Grille: 15.0"h (383 mm) x 16.0"w (405 mm) x .10"d (4 mm)

RCC 640 R Retrofit

- Driver Complement: (8) RCC 4" x 6" Woofers
- System DCR: 6.4 Ω
- Power Handling: 400 WRMS
- System Response: 20 Hz - 160 Hz \pm 3 dB
- SPL: 94 dB @ 2.83 V / 1 M
- Magnetic Grilles: Micro Perforated Steel, Paintable
- Cut-out: 25.3"h (630 mm) x 14.2"w (360 mm) x 3.8"d (97 mm)
- Grille: 26.9"h (683 mm) x 16.0"w (405 mm) x .10"d (4 mm)

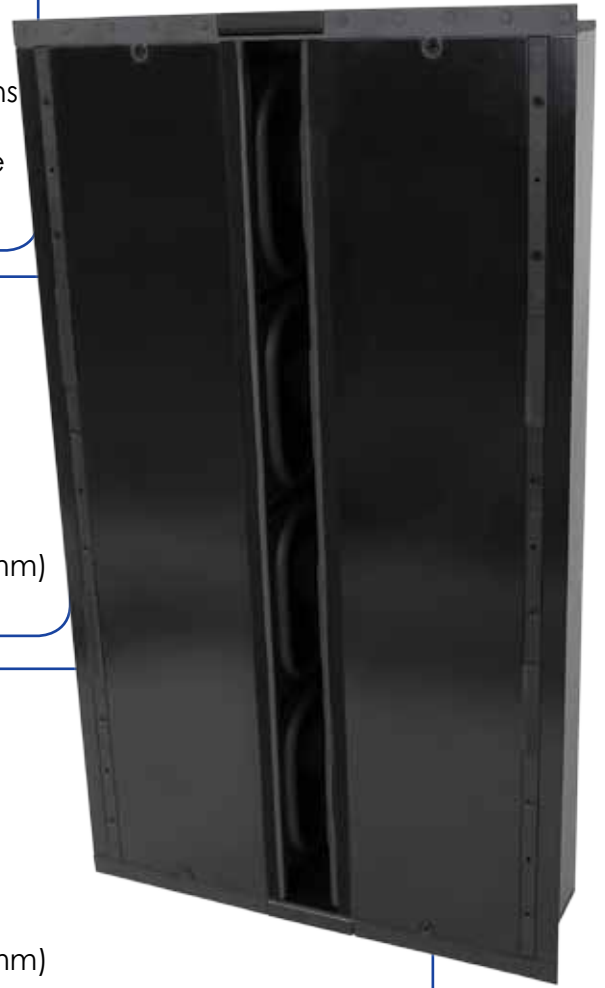

RCC1000-SA Amplifier

- Dimensions: 1.75"h (44.5 mm) x 19.0"w (482.6 mm) x 13.0"d (330.2 mm) with Rack Ears
- Power output: 1,000 Watts RMS @ 4 ohm
- Frequency response: 20 Hz - 200 Hz
- Inputs: 1 ea. balanced XLR, 1 pr. unbalanced RCA L/R
- Outputs: 1ch speaker level & 1pr. unbalanced RCA L/R
- Compatible speakers: 1 ea. RCC640-PC or R; 2 ea. RCC320-PC or R, paralleled on output
- LPF crossover: 40 - 160 Hz, LFE
- Phase control: 0 - 180°
- Cabinet / finish: extruded aluminum / black brushed anodized steel / black powdercoat
- Control: IR remote control, IR Rx on front panel, IR Input
- 12 VDC power trigger on back panel
- Voltage: 110 - 230 AC volts, auto-sensing universal power supply
- Weight: 14.5 lbs. (6.6 kg.)



2231 Meridian Blvd. #1 Minden, Nevada 89423
 Ph:(775) 783-4770 Fx:(775) 783-4770
 ©2013 Artison, LLC All Rights Reserved

